

## TECHNICAL DOCUMENT

- [To Remove the Empty Used Toner Cartridge](#)
- [To Install a New Toner Cartridge](#)
- [Recommended Supplies](#)

### Okidata OL-400/800 Toner Tubes

DOC-0241

#### TO REMOVE THE EMPTY USED TONER CARTRIDGE




Open cover, pull blue colored locking tabs back towards the front of the printer. The blue tabs should be straight up to completely close the toner cartridge. Remove cartridge from printer. See Figure 1.

#### TO INSTALL A NEW TONER CARTRIDGE




1. Gently shake the cartridge from side to side to distribute the toner evenly.
2. Hold the cartridge with the arrow facing away from you.
3. Remove the white seal tape.
4. Line up grooves on ends of cartridge with the blue guides on the locking tabs. The arrow on the cartridge must face the back of the printer. See Figure 2.
5. Install cartridge into printer. Press the two blue locking tabs forward until locked in place with a click. See figure 3.
6. Remove the old fuser pad (blue) in the rear of the printer. Hold the handle on the right side. Push inward to the left and lift up to remove. Install the new pad using the reverse procedure. See Figure 4.

For additional information, refer to the user's manual.

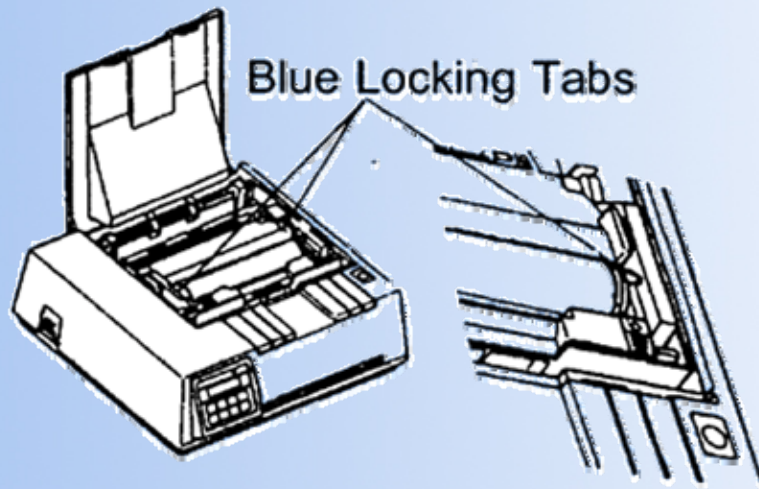


**Figure 1**

Blue Chips

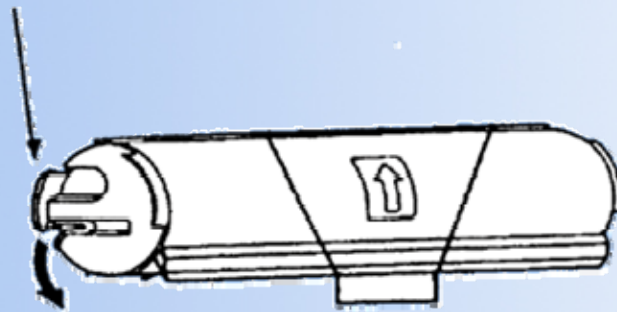

**Figure 2**

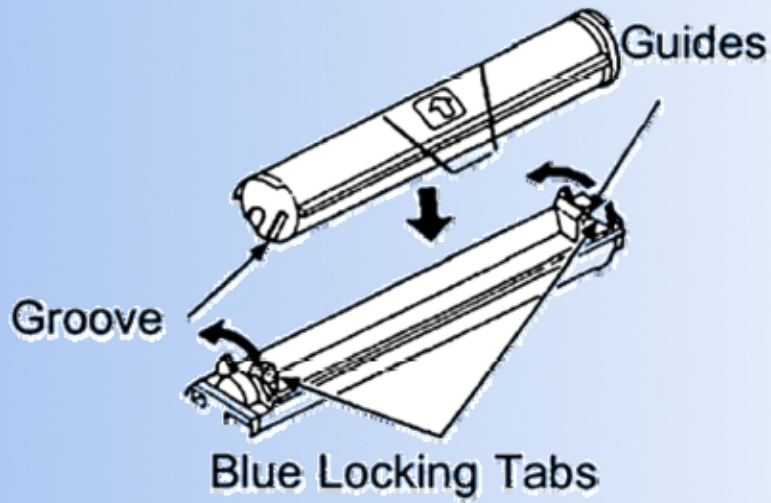

**Figure 3**

## RECOMMENDED SUPPLIES



Microsoft OLE DB Provider for ODBC Drivers error '80004005'

[Microsoft][ODBC Microsoft Access Driver]General error Unable to open registry key 'Temporary (volatile) Jet DSN for process 0x2de8 Thread 0x1ee4 DBC 0x3f3b014 Jet'.

/script/catSearch.asp, line 58