


LEXMARK™ X850

EASY TO REMANUFACTURE CARTRIDGE INSTRUCTIONS

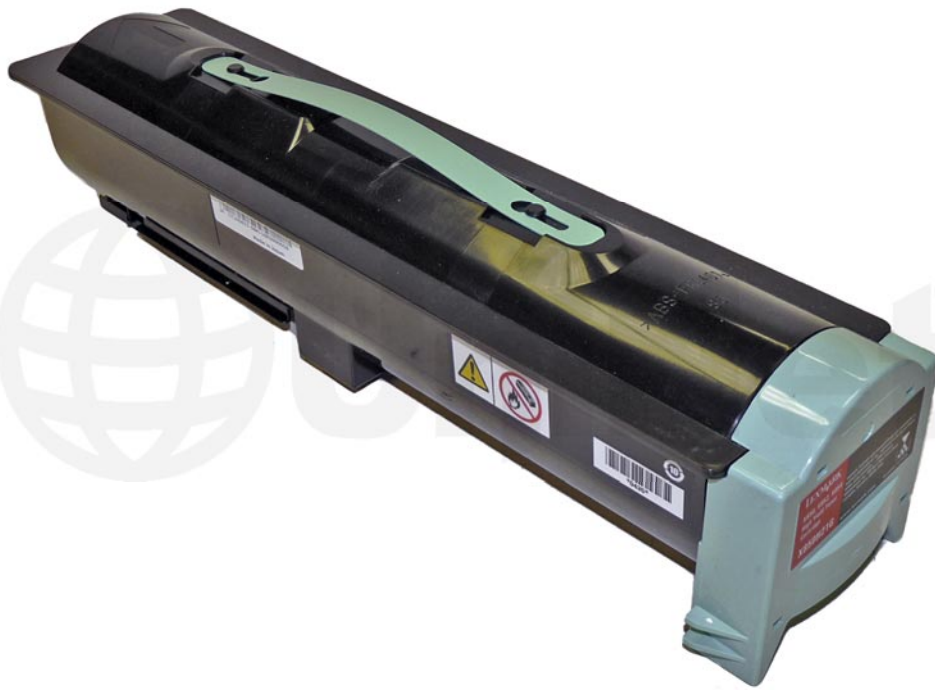

LEXMARK X850 TONER CARTRIDGE

REMANUFACTURING THE LEXMARK X850 TONER CARTRIDGE

By Mike Josiah and the Technical Staff at UniNet



The Lexmark X850 toner cartridges are rated for 30,000 pages.

The OEM part number for the cartridge is X850H21G.

There is a chip used on this cartridge that must be replaced each cycle.



1. On the colored end cap, locate the four small rectangular holes. In each of these holes is a locking tab. With a small jeweler's screwdriver, press up on the top two tabs to release the top half, and press down with the screwdriver to release the bottom half. Remove the end cap.



2. Remove the fill plug and clean out all remaining toner.




3. Fill with toner for use in the Lexmark X850.

Replace the fill plug.



4. Install the end cap.

Make sure it snaps fully in place.

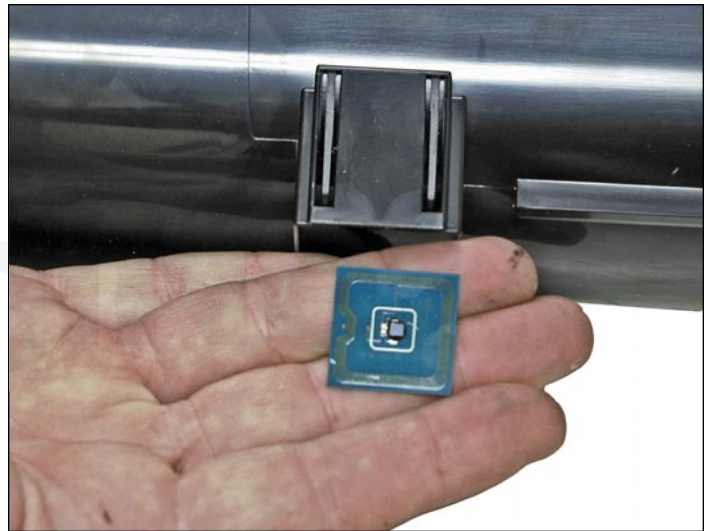

5. Replace the chip by pulling up on the chip cover, and lifting the chip up slightly so it can slide over the two tabs.