

OKIDATA® C5100 SERIES

EASY TO REMANUFACTURE CARTRIDGE INSTRUCTIONS




OKIDATA C5100 SERIES TONER CARTRIDGE

REMANUFACTURING THE OKIDATA C5100 SERIES TONER CARTRIDGES

By Mike Josiah and the Technical Staff at UniNet




The Okidata C5100 series of toner tubes are rated for 5,000 pages at 5% coverage. They are compatible with the C5000, 5100, 5150, 5200, 5250, 5300, 5400, 5450, MFP 5510, 5250 and 5540. The OEM part numbers are 42127404 Black, 42127403 Cyan, 42127402 Magenta, and 42127401 Yellow. There is no chip on the cartridge.

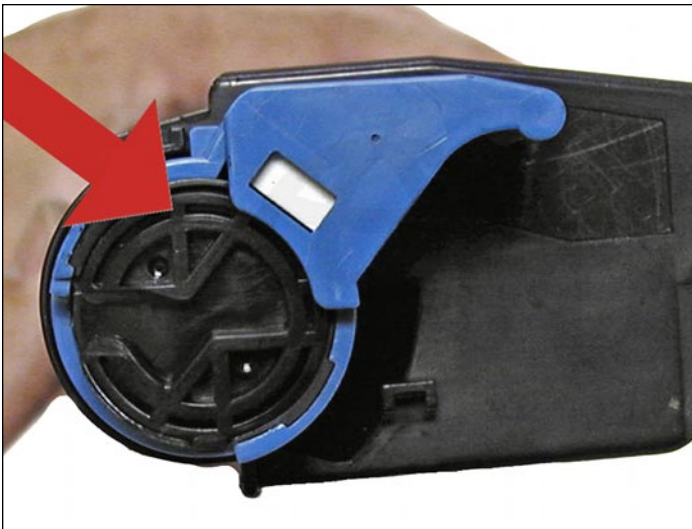


1. Remove the fill plug from the blue handle.

Clean out the old toner from the cartridge.

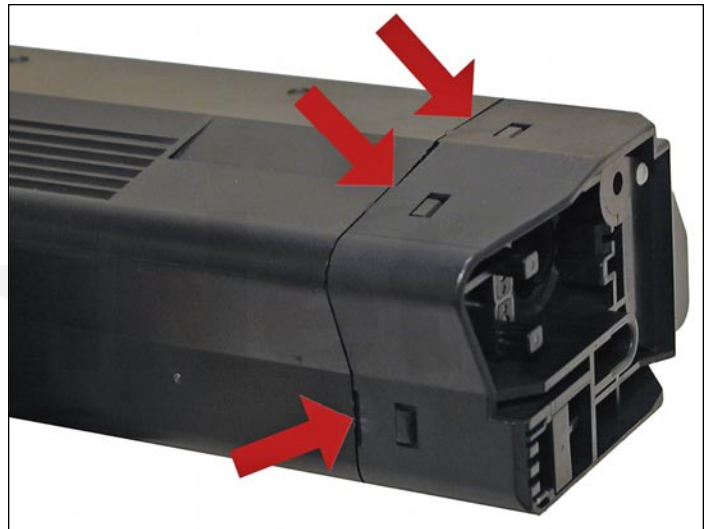

2. Press in on the tabs on the opposite side of the cartridge.

Remove the end cap and remove all the remaining toner.

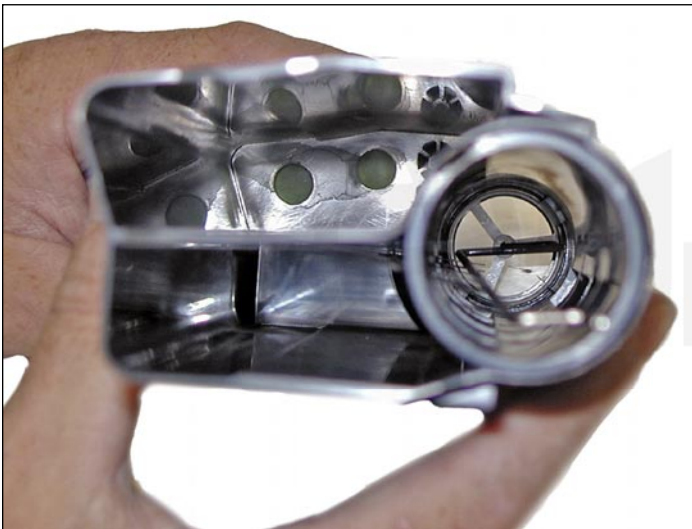

3. Open the toner port, and snap the end cap back in place.

As you press the end cap on, watch through the port to make sure the mixing auger fits into the drive gear.



4. Close the port, fill with new toner, and replace the fill plug.

UniNet®