

OKIDATA® C7300 SERIES

EASY TO REMANUFACTURE CARTRIDGE INSTRUCTIONS




OKIDATA C7300 SERIES TONER CARTRIDGE

REMANUFACTURING THE OKIDATA C7300 SERIES TONER CARTRIDGES

By Mike Josiah and the Technical Staff at UniNet



The Okidata C7300 series toner cartridges are rated for 10,000 pages black at 5% coverage. They are compatible with the C7000, 7100, 7200, 7300, 7400, and C7500 machines. The OEM part numbers are the 41963004 Black, 41963003 Cyan, 41963002 Magenta, and 41963001 Yellow. There is no chip on the cartridge.

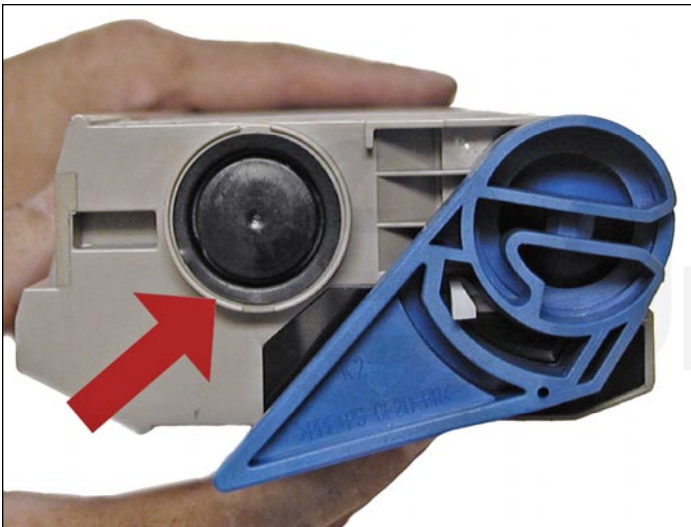

1. Remove the fill plug from the side of the cartridge.

Clean out the old toner from the cartridge.




2. Press in on the tabs on the opposite side of the cartridge.

Remove the end cap and remove all the remaining toner.



3. Start to snap the end cap back in place. As you press the end cap on, watch to make sure the mixing auger fits into the bushing and metal rod fit into their proper places.

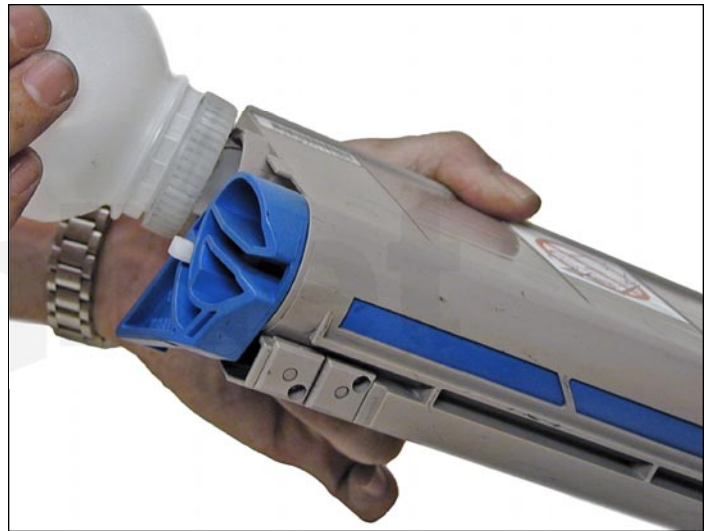

4. Close the port.

Fill with new toner and replace the fill plug.